





## ►KV901-Y KÜRESEL VANA

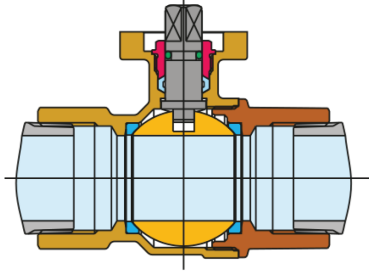

- 1 **Gövde**  
DW 817N UNI EN 12165
- 2 **Ara parça**  
DW 817N UNI EN 12165
- 3 **Küre**  
DW 814N UNI EN 12164
- 4 **Küre contası**  
PT.FE.
- 5 **Mil**  
DW 816N UNI EN 12164
- 6 **O-ring**  
ELASTOMER
- 7 **Sızdırmazlık**  
DW 814N UNI EN 12164
- 8 **Baskı pulu**  
PT.FE.
- 9 **Mil contası**  
PT.FE.

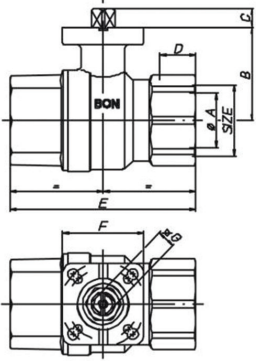

<b>GÖVDE</b>	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	-	-	-
<b>DN MAX (Bar)</b>	40	40	40	40	40	40	-	-	-
<b>TORK (Nm)</b>	3,2	3,2	4,2	5,6	8,4	9,8	-	-	-
<b>GÖVDE</b>	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2
<b>PN 25</b>	25	25	25	25	25	25	25	25	25
<b>TORK (Nm)</b>	2,6	2,6	4	5,2	7,8	9,1	13	25	38
<b>GÖVDE</b>	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2
<b>PN 25</b>	16	16	16	16	16	16	16	16	16
<b>TORK (Nm)</b>	2,4	2,4	3,6	5	7,2	8,5	12	23	36
<b>GÖVDE</b>	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2
<b>PN 25</b>	0	0	0	0	0	0	0	0	0
<b>TORK (Nm)</b>	2	2	3	4	6	7	10	20	32

Farklı aktüatörler ile kullanılmak istenildiği güvenlik katsayısını dikkate alınız.

<b>ÖLÇÜ</b>	1/4"	3/8"	1/2"	3/4"	1"	1" 1/4	1" 1/2	2"	2" 1/2
<b>ØA pass./bore</b>	8	10	15	20	25	32	40	50	63
<b>B mm</b>	38	38	38	40,5	44	55	61,5	73	82,75
<b>C mm</b>	9	9	9	9	9	11	11	14	15,5
<b>D mm</b>	15	15	15	16,3	19,1	21,4	21,4	25,7	30,2
<b>E mm</b>	75	75	75	80	90	110	120	140	155
<b>F mm</b>	37	37	37	37	37	48	48	48	68
<b>ØG mm</b>	9	9	9	9	9	11	11	14	14
<b>SW mm</b>	26	26	26	32	41	50	55	70	83
<b>ISO FLANŞ</b>	F3	F3	F3	F3	F3/F4	F4/F5	F4/F5	F5	F7
<b>Peso /Ağırlık gr.</b>	412	390	342	463	705	1220	1650	2888	3285